



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**09.02.2000 Bulletin 2000/06**

(51) Int Cl.7: **G11B 7/125**

(21) Application number: **99306165.4**

(22) Date of filing: **03.08.1999**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE**  
 Designated Extension States:  
**AL LT LV MK RO SI**

- **Sukeda, Hirofumi**  
**Tokorozawa-shi (JP)**
- **Minemura, Hiroyuki**  
**Kokubunji-shi (JP)**
- **Kando, Hidehiko**  
**Matsudo-shi (JP)**
- **Miyamoto, Makoto**  
**Ome-shi (JP)**

(30) Priority: **04.08.1998 JP 22009798**  
**01.09.1998 JP 24674498**

(71) Applicant: **HITACHI, LTD.**  
**Chiyoda-ku, Tokyo (JP)**


(74) Representative: **Calderbank, Thomas Roger et al**  
**MEWBURN ELLIS**  
**York House**  
**23 Kingsway**  
**London WC2B 6HP (GB)**

(72) Inventors:  
 • **Maeda, Takeshi**  
**Kokubunji-shi (JP)**

(54) **Information recording method, information recording medium and information recording apparatus**

(57) Optimum edge recording methods are previously held in a control data zone on the recording medium (100), and one of the methods is selected in a write mode by referring to the recorded methods. An information recording apparatus for forming a recording mark by converting an energy beam to a multi-pulsed train and irradiating the beam onto the recording medium (100) includes that change-over can be realized between mark edge control based on control of both pulse edge positions and mark edge control based on control of one of the pulse edge positions.

Fig. 6

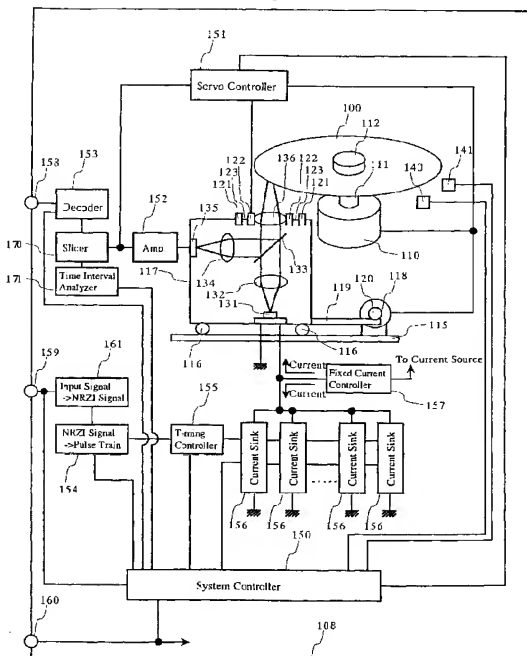

## Description

**[0001]** The present invention relates to information recording methods and apparatuses which use a medium for recording information by irradiating an energy beam and more particularly, to an information recording method and medium which can exhibit excellent effects on a phase transition optical disk as well as to an information recording apparatus based on the information recording method.

**[0002]** In a related art method for performing recording and erasing operations over a rewritable recording film, for example, when an optical disk is used which has an exchange coupling two-layer film as a recording film as disclosed in U.S. Patent No. 5,475,657, or when a phase transition type optical disk recording film is used which can erase information at high speed by realizing crystallization in substantially the same time as a laser irradiation time for recording as disclosed in JP-A-62-259229 (laid-open on November 11, 1987); the recording and erasing are carried out by changing energy of one energy beam to one of at least two levels higher than a reading power level, that is, by changing the energy of the energy beam to one of at least a high power level and an intermediate power level. This method is advantageous in that so-called overwriting (rewriting based on overwriting) of recording new information while erasing existing information can be realized. Further, as disclosed in JP-A-62-259229 and JP-A-3-185629 (laid-open on August 13, 1991), such a phenomenon that a recording mark becomes a tear drop shape can be suppressed (a backward width of the recording mark becomes larger than a forward width thereof) by changing the energy of an energy beam into one of three power levels, that is, high and intermediate levels and a level lower than the intermediate level.

**[0003]** In recent years, there has been put in practical use a DVD-RAM (digital video disk-random access memory) which uses a 120mm-diametered disk made of phase transition material and having a memory capacity of 2.6 GB on its one side. A recording control method employed in this example is as shown in Fig. 1 and is explained as DVD Specification for Rewritable Disc (DVD-RAM), Part 1, Physical Specifications, version 1.0 (July, 1997), Page PHX-9, Fig. F-1.

**[0004]** JP-A-63-48617 (laid-open on March 1, 1988) also discloses a method for changing an energy beam depending on a mark length (corresponding to a region length in a second state in claims at the time of its application) or on a space length (corresponding to a region length in a first state in claims at the time of its application).

**[0005]** Also disclosed in JP-A-8-287465 (laid-open on November 1, 1996) is a method for converting an energy beam to a multi-pulsed train depending on a mark length or a space length.

**[0006]** Studies concerning achievement of a higher density of rewritable digital video disk (DVD-RAM) using

a phase transition recording film have recently been advanced. With such an optical disk device as to perform mark edge recording over a phase transition recording film as in DVD-RAM, it is required for the purpose of avoiding mark shape distortion or missing of erasing recorded marks that an achieved temperature and a cooling rate in a record mode are substantially the same even in any outer edge of a region of a recording film melted for formation of a recording mark. However, methods proposed so far failed to satisfy the above condition sufficiently in their various recording waveforms and were limited in their achievable recording densities. Further, recording characteristics of information recording medium usually vary with medium manufacturers, manufacturing times and lots. Thus as it is desired to obtain higher density recording, it becomes more difficult to secure a recording compatibility therebetween.

**[0007]** In particular, in the case of a DVD-RAM having a recording capacity of 4.7GB higher in density than a DVD-RAM having a recording capacity of 2.6GB, when recording is carried out with the same spot diameter as in the 2.6GB DVD-RAM, compatibility with the 2.6GB DVD-RAM can be achieved more easily. However, as a linear density is increased with the same spot used, a spacing between positions at which two adjacent recording pulses are irradiated on the recording medium becomes smaller than the spot diameter of a laser beam on the medium. Therefore, since light distribution is overlapped when compared with the 2.6GB case, it becomes necessary to prevent distortion of a recording mark shape caused by the overlapping. Moreover, when a space between recording marks is small, impossible separation between the marks with a reading beam spot causes a shift of a recording mark edge position of a reproduction signal waveform. It is also required to prevent such a shift. The edge position shifting way depends largely on the design of the recording medium, and the recording waveform suitable for a specific recording medium is not always suitable for another recording medium. In current circumstances, because of the increased linear density, the recording mark edge shift is increased by a mismatch between the recording medium and recording waveform to such a level as not to be negligible.

**[0008]** It is therefore an object of the present invention to provide a method and apparatus which can accurately record information with use of the same spot and can increase its density while attaining a compatibility. A related object of the present invention is to provide an information recording method, medium and apparatus which can stably record information on various sorts of recording media having different characteristics and also can easily secure a recording compatibility therebetween.

**[0009]** In order to attain the above objects, an information recording method, medium and apparatus which follow are used.

**[0010]** 1) An information recording method wherein a

single recording mark is formed on a recording medium with use of a train of a plurality of energy beam pulses, and any of a first case where a falling edge timing of a head pulse in the energy beam pulse train is substantially stationary while a rising edge timing thereof is varied and a second case where the rising and falling edge timings of the head pulse are varied, is used to record information on the basis of control data previously recorded on the recording medium.

**[0011]** 2) An information recording apparatus which comprises an energy beam generator; a power adjustment mechanism for adjusting a power level of an energy beam generated by the energy beam generator; a holder mechanism for holding a recording medium; a movement mechanism for relatively moving the energy beam and the recording medium; a signal processing circuit for changing information to be recorded to the power level of the energy beam; first timing adjustment means for causing the power adjustment mechanism to control the energy beam generator to generate a train of a plurality of energy beam pulses from the generator, for substantially fixing a falling edge timing of a head pulse in the energy beam pulse train, and at the same time for changing a rising edge timing thereof on the basis of control data previously recorded on the recording medium at time of forming a single recording medium on the recording medium; and second timing adjustment means for changing the rising and falling edge timings of the head pulse.

**[0012]** 3) An information recording method which includes at least one of methods 1 and 2 and uses a recording medium capable of forming a first state zone with a first power level of an energy beam and a second state zone with a second power level of the energy beam higher than the first power level, wherein the energy beam and the recording medium are relatively moved to irradiate the energy beam on the recording medium and to form the first and second state zones with predetermined lengths and with a predetermined spacing therebetween on the recording medium to record information on the recording medium, a third power level lower than the second power level is provided, and at the time of forming the second state zone having a specific length on the recording medium, a duration of the third power level is included as mixed in a duration of the second power level to convert the energy beam to a multi-pulsed train and to irradiate the energy beam on the recording medium, the method 1 substantially fixes a falling edge position of a head pulse in the multi-pulsed train and moves a rising edge position thereof at the time of forming the second state zone having a specific length, the method 2 substantially fixes a rising edge position of a tail pulse of the multi-pulsed train and moves a falling edge position thereof at the time of forming the second state zone having the specific length, a fourth power level equal to or lower than the first power level is provided, the power level of the energy beam following the tail pulse of the multi-pulsed train is kept at the

fourth power level for a predetermined time and then kept at the first power level, and a time during which the fourth power level is kept is always constant regardless of the falling edge position of the tail pulse.

**[0013]** Since the above recording methods set forth in the above 1) and 2), information recording apparatus and corresponding information recording media are employed, the timing adjustment means always suitable for the information recording medium can be selected and information can be recorded therein always stably.

**[0014]** Since the above recording method of the above 3) is used, the time during which the constant fourth power level is maintained can be always realized for the information recording medium regardless of the timing adjustment. Therefore, since thermal conditions always optimum for the information recording medium can be maintained, information can be recorded in the medium always stably.

**[0015]** Explanation will be made as to methods, apparatuses and recording media for recording information always stably in connection with embodiments which follow.

**[0016]** In the drawings:

Fig. 1 shows how to record information in a recording strategy to which the present invention is applied;

Figs. 2A and 2B show experimental results in a case 2 in the recording strategy to which the present invention is applied;

Figs. 3A and 3B show experimental results in a case 2 in the recording strategy to which the present invention is applied;

Figs. 4A and 4B show experimental results in a case 1 in the recording strategy to which the present invention is applied;

Figs. 5A and 5B show experimental results in the case 1 in the recording strategy to which the present invention is applied; and

Fig. 6 shows specific examples of an information recording medium and apparatus to which the present invention is applied.

**[0017]** Explanation will be first be made as to reference numerals used herein.

**[0018]** Reference numeral 100 denotes a recording medium, 108 a casing, 110 a motor, 111 a rotary shaft, 112 a chucking mechanism, 115 a rail, 116 a rail guide, 117 a case, 118 a rotating motor, 119 a linear gear, 120 a rotary gear, 121 a magnet, 122 a coil, 123 a suspension, 130 an objective lens, 131 semiconductor laser, 132 a collimating lens, 133 a beam splitter, 134 a detection lens, 135 a photodetector, 140 a detector, 141 a detection switch, 150 a system controller, 151 a servo controller, 152 a amplifier, 153 a decoder, 153 a decoder, 154 a signal processing circuit, 155 a timing controller or delay circuit, 156 a current sink, 157 a constant or fixed current controller, 158 a output connector, 159 an

input connector, 160 a terminal, 161 a signal processing circuit.

**[0019]** The present invention will next be explained in accordance with embodiments which follow.

**[0020]** Shown in Fig. 1 are variations with time in the power level of an energy beam irradiated on a recording medium at the time of recording information on the recording medium. In this embodiment, how to change the power level at the time of recording information with time is referred to generally as write or recording strategy. Fig. 1 shows a recording strategy including an information recording method of the present invention. The present embodiment will be explained in connection with a DVD-RAM as a specific example. In the case of the DVD-RAM, assuming that a reference clock in recording and reproduction modes has a time width  $T_w$ , then the shortest mark and/or space has a length of  $3T_w$  (time length of 3 times as long as the time  $T_w$ ), and the longest mark and/or space has usually a length of  $11T_w$  and in a special case, of  $14T_w$ .

**[0021]** When an NRZI signal as information is given to be recorded on the recording medium in a time series manner, a suitable signal processing circuit converts the NRZI signal to a time series variation in the power level of an energy beam, which variation is shown in Fig. 1 as a light pulse waveform. The power level is set to have 4 levels of write level, bias level 1, bias level 2 and bias level 3. At the bias level 1, the recording medium can be shifted to a first state; while at the write level, the recording medium can be shifted to a second state. The bias level 3 is set to be equal to or lower than the bias level 1. When it is desired to form a second state area in the recording medium and the second state area has a length of  $4T_w$  or more (that is, the NRZI signal has a length of  $4T_w$  or more), a duration having the power level of the bias level 3 is mixedly placed in the irradiation period of the write level to change the energy beam in a multi-pulsed form. In the multi-pulsed energy beam, the first and last light pulses are referred to as the head or first and tail or last pulses respectively. Between the head and tail pulses, light pulses are repeated between the write level and bias level 3. The repetition frequency, when the NRZI signal has a length of  $n$  ( $n > 3$ ), becomes  $(n-4)$ . The entire repetitive pulses between the head and tail pulses will be generally called a comb-shaped pulse. Accordingly, when it is desired to form a second state area for the NRZI signal having a length of  $5T_w$  or more, the recording pulse is made up of the head, comb-shaped and tail pulses. When it is desired to form a second state area for the NRZI signal having a length of  $4T_w$ , the recording pulse is made up of the head and tail pulses. When it is desired to form a second state area for the NRZI signal having a length of  $3T_w$ , the recording pulse is made up of a single pulse.

**[0022]** A power level equal to or lower than the bias level 1 and equal to or higher than the bias level 3 is set and is referred to as the bias level 2. Following the tail pulse for  $4T_w$  or more and following the write light pulse

for  $3T_w$ , the power level of the energy beam is held at the bias level 2 for a predetermined time.

**[0023]** There is possibility that the bias level 2 is equal to either one of the bias levels 1 and 3. Or there is possibility that the write level and bias levels 2 and 3 are all exactly at the same power level. There is a case where reference values of the write level and bias levels 1, 2 and 3 are previously recorded at suitable locations on the recording medium as medium information. In this case the locations of the recording medium where the medium information relating to the recording strategy is recorded are referred to as information tracks for a control data zone. The reference values of the power levels are read out from the information tracks of the control data zone on the recording medium to determine each power level in a write mode.

**[0024]** Consider in Fig. 1 a case where it is desired to form a second state area on the recording medium for the NRZI signal having a length of  $4T_w$  or more and to define a recording waveform. A time elapsed by  $T_{EFP}$  from a rising edge of the NRZI signal defines a falling edge of the head pulse in a write pulse train. Further, a rising edge of the head pulse is present at a time earlier by a time  $T_{FP}$  from the falling edge of the head pulse. This naturally means that, if the elapsed time from the rising edge of the NRZI signal to the rising edge of the head pulse is defined as  $T_{SFP}$ , the relationship between  $T_{EFP}$ ,  $T_{SFP}$  and  $T_{FP}$  becomes  $T_{EFP} = T_{SFP} + T_{FP}$ . A rising edge of the tail pulse in the write pulse train is present at a time elapsed by a time  $T_{SLP}$  from a reference time earlier by a time  $2T_w$  than a falling edge time of the NRZI signal. At a time elapsed by a time  $T_{ELP}$  from the rising edge time of the tail pulse, there is present a falling edge of the tail pulse. This naturally means that, if the elapsed time from the reference time earlier by a time  $2T_w$  than a falling edge of NRZI signal to the falling edge of the tail pulse is defined as  $T_{ELP}$ , the relationship between  $T_{SLP}$ ,  $T_{ELP}$  and  $T_{LP}$  becomes  $T_{ELP} = T_{SLP} + T_{LP}$ .

**[0025]** There may sometimes be present a comb-shaped pulse train between the head and tail pulses. Rising edges of pulses in the comb-shaped pulse train coincide with the position of the reference clock. At a time elapsed by the time  $T_{MP}$  from the rising edge time of each pulse, the pulse falls.

**[0026]** Consider a case where it is desired to form on the recording medium a second state area corresponding to the NRZI signal of  $3T_w$ . Assuming that a time elapsed by a time  $T_{EFP}$  from a rising edge of the NRZI signal is set as a reference time, then there exists a rising edge in a light pulse at a time earlier by the time  $T_{FP}$  from the reference time. This naturally means that, if the elapsed time from the rising edge of the NRZI signal to the rising edge of the light pulse is defined as  $T_{SFP}$ , the relationship between  $T_{EFP}$ ,  $T_{SFP}$  and  $T_{FP}$  becomes  $T_{EFP} = T_{SFP} + T_{FP}$ . Further, when a time earlier by a time  $2T_w$  from the falling edge time of the NRZI signal is set as a reference time and a time elapsed by the time  $T_{SLP}$  from the reference time is set as a second reference time, the

light pulse falls at a time elapsed by a time  $T_{LP}$  from the second reference time. This naturally means that, if the elapsed time from the reference time earlier by a time  $2T_w$  from a falling edge of NRZI signal to a falling edge of the light pulse is defined as  $T_{ELP}$ , the relationship between  $T_{SLP}$ ,  $T_{ELP}$  and  $T_{LP}$  becomes  $T_{ELP} = T_{SLP} + T_{LP}$ .  
**[0027]** The last pulse of the NRZI signal of  $4T_w$  or more or the write pulse of the NRZI signal of  $3T_w$  is followed by a duration having a power level of the bias level 2 and having a time length of  $T_{LC}$ .

**[0028]** The reference values of the times  $T_{EFF}$ ,  $T_{SFP}$ ,  $T_{FP}$ ,  $T_{ELP}$ ,  $T_{SLP}$ ,  $T_{LP}$ ,  $T_{LC}$  and  $T_{MP}$  defining the write pulse are read out from the information track of the control data zone, and these times are determined based on the read-out reference values.

**[0029]** The times  $T_{EFF}$ ,  $T_{SFP}$ ,  $T_{FP}$ ,  $T_{ELP}$ ,  $T_{SLP}$ ,  $T_{LP}$ ,  $T_{LC}$  and  $T_{MP}$  defining the write pulse are not always limited to having their constant values and sometimes may be required to be changed depending on combinations of the NRZI signals. In particular, in the case of DVD-RAM having a memory capacity of 4.7GB per one side as an example, the NRZI signal of  $3T_w$  as the shortest mark has a length of about 0.42 microns that is shorter than a write spot diameter of 0.45 microns. When such high density recording is carried out, thermal interference between adjacent marks becomes great, which, in some cases, makes it difficult to realize the recording always stably. To avoid this, it is considered to change the write waveform to a suitable form according to the combinations of the NRZI signals. In order to correct a shift in the leading edge, any of the times  $T_{EFF}$  and  $T_{FP}$  is changed. Changes in these times from the reference values thereof are referred to as  $\Delta T_{EFF}$  and  $\Delta T_{FP}$  respectively.

**[0030]** If  $T_{EFF}$  is changed by  $\Delta T_{EFF}$  and  $T_{FP}$  is not changed,  $T_{SFP}$  changes by  $\Delta T_{EFF}$ . If  $T_{FP}$  is changed by  $\Delta T_{FP}$  and  $T_{EFF}$  is not changed,  $T_{SFP}$  changes by  $-\Delta T_{FP}$ . These changes naturally come from the relationship of  $T_{EFF} = T_{SFP} + T_{FP}$ .

**[0031]** The changes can be described by the followings with completely the same meaning. In case  $T_{EFF}$  is changed without changing  $T_{FP}$ ,  $T_{SFP}$  is changed by  $\Delta T_{SFP}$  without changing  $T_{FP}$ . Then  $T_{EFF}$  is automatically changed by  $\Delta T_{SFP}$ . In case  $T_{FP}$  is changed without changing  $T_{EFF}$ ,  $T_{SFP}$  is changed by  $\Delta T_{SFP}$  without changing  $T_{EFF}$ . Then  $T_{FP}$  is automatically changed by  $-\Delta T_{SFP}$ .

**[0032]** The meaning of the two descriptions to correct a shift in the leading edge is completely equivalent. To avoid redundancy, only the first description is used in this embodiment. The second description is always applicable to the part in this embodiment where the first description is employed.

**[0033]** In order to correct a shift in the trailing edge, any of the times  $T_{SLP}$  and  $T_{LP}$  is changed. Changes in these times from the reference values thereof are referred to as  $\Delta T_{SLP}$  and  $\Delta T_{LP}$  respectively.

**[0034]** If  $T_{SLP}$  is changed by  $\Delta T_{SLP}$  and  $T_{LP}$  is not

changed,  $T_{ELP}$  changes by  $\Delta T_{SLP}$ . If  $T_{LP}$  is changed by  $\Delta T_{LP}$  and  $T_{SLP}$  is not changed,  $T_{ELP}$  changes by  $\Delta T_{LP}$ . These changes naturally come from the relationship of  $T_{ELP} = T_{SLP} + T_{LP}$ .

**[0035]** The changes can be described by the followings with completely the same meaning. In case  $T_{SLP}$  is changed without changing  $T_{LP}$ ,  $T_{ELP}$  is changed by  $\Delta T_{ELP}$  without changing  $T_{LP}$ . Then  $T_{SLP}$  is automatically changed by  $\Delta T_{ELP}$ . In case  $T_{LP}$  is changed without changing  $T_{SLP}$ ,  $T_{ELP}$  is changed by  $\Delta T_{ELP}$  without changing  $T_{SLP}$ . Then  $T_{LP}$  is automatically changed by  $\Delta T_{ELP}$ .

**[0036]** The meaning of the two descriptions to correct a shift in the trailing edge is completely equivalent. To avoid redundancy, only the first description is used in this embodiment. The second description is always applicable to the part in this embodiment where the first description is employed.

**[0037]** A first lookup table of  $T_{MF}$  for the leading edge will be defined. The table is a list of values which are determined by combinations of a length  $M(n)$  of a mark being currently written and a length  $S(n-1)$  of a space precedent to the mark and which can be positive or negative. Next a second lookup table of  $T_{ML}$  for the trailing edge will be defined. This table is a list of values which are determined by combinations of the length  $M(n)$  of a mark being currently written and a length  $S(n+1)$  of a space subsequent to the mark and which can be positive or negative.

**[0038]** In a case 1, the value of  $T_{MF}$  is made equal to the value of  $\Delta T_{FP}$  and the value of  $T_{ML}$  is also made equal to the value of  $\Delta T_{LP}$ . In this case, the values of  $T_{FP}$  and  $T_{LP}$  vary depending on combinations of the NRZI signals. That is, in the head pulse, its rising edge position varies while its falling edge position is stationary. In the tail pulse, on the other hand, its rising edge position is stationary while its falling edge position varies.

**[0039]** If the second description to correct a shift in the leading and the trailing edge is used, the description for case 1 is as follows. The value of  $T_{MF}$  is made equal to the value of  $T_{SFP}$  without changing the value of  $T_{EFF}$ . The value of  $T_{ML}$  is made equal to the value of  $T_{ELP}$  without changing the value of  $T_{SLP}$ . The meaning of this description is perfectly the same as the first one.

**[0040]** In a case 2, the value of  $T_{MF}$  is made equal to the value of  $\Delta T_{EFF}$  and the value of  $T_{ML}$  is made equal to the value of  $\Delta T_{LP}$ . In this case, the values of  $T_{EFF}$  and  $T_{LP}$  vary depending on combinations of the NRZI signals. That is, in the head pulse, its rising and falling edge positions vary at the same time. In the tail pulse, on the other hand, its rising edge position is stationary while its falling edge position varies.

**[0041]** In a case 3, the value of  $T_{MF}$  is made equal to the value of  $\Delta T_{FP}$  and also the value of  $T_{ML}$  is made equal to the value of  $\Delta T_{SLP}$ . In this case, the values of  $T_{FP}$  and  $T_{SLP}$  vary depending on combinations of the NRZI signals. That is, in the head pulse, its rising edge position varies while its falling edge position is station-

ary. In the tail pulse, on the other hand, its rising and falling edge positions vary at the same time.

**[0042]** In a case 4, the value of  $T_{MF}$  is made equal to the value of  $\Delta T_{EFP}$  and also the value of  $T_{ML}$  is made equal to the value of  $\Delta T_{SLP}$ . In this case, the values of  $T_{EFP}$  and  $T_{SLP}$  vary depending on combinations of the NRZI signals. That is, in the head pulse, its rising and falling edge positions vary at the same time. In the tail pulse, on the other hand, its rising and falling edge positions vary at the same time.

**[0043]** If the second description to correct a shift in the leading and trailing edges is used, the description for case 2 is as follows. The value of  $T_{MF}$  is made equal to the value of  $T_{SFP}$  without changing the value of  $T_{FP}$ . The value of  $T_{ML}$  is made equal to the value of  $T_{ELP}$  without changing  $T_{LP}$ . The meaning of this description is perfectly the same as the first one.

**[0044]** In a case 5, the value of  $T_{MF}$  is made equal to the value of  $\Delta T_{FP}$ . In this case, the value of  $T_{FP}$  varies depending on combinations of the NRZI signals. That is, in the head pulse, its rising edge position varies while its falling edge position is stationary.

**[0045]** In a case 6, the value of  $T_{MF}$  is made equal to the value of  $\Delta T_{EFP}$ . In this case, the value of  $T_{EFP}$  varies depending on combinations of the NRZI signals. That is, in the head pulse, its rising and falling edge positions vary at the same time.

**[0046]** In a case 7, the value of  $T_{ML}$  is made equal to the value of  $\Delta T_{LP}$ . In this case the value of  $T_{LP}$  varies depending on combinations of the NRZI signals. That is, in the tail pulse, its rising edge position is stationary while its falling edge position varies.

**[0047]** In a case 8, the value of  $T_{ML}$  is made equal to the value of  $\Delta T_{SLP}$ . In this case, the value of  $T_{SLP}$  varies depending on combinations of the NRZI signals. That is, in the tail pulse, its rising and falling edge positions vary at the same time.

**[0048]** The values included in the first and second lookup tables and information on selection of any of the cases 1 to 8 are determined by reading information written in the information track of the control data zone on the recording medium.

**[0049]** As has been explained above, since adaptive waveform changes based on the lookup tables are divided into the cases 1 to 8 and any of the cases is selected, the method of the present invention can advantageously cope with recording media having various characteristics and can record information always stably with good compatibility.

**[0050]** In the present embodiment, the first lookup table was defined to have  $4 \times 4$  cases of 4 sorts of  $M(n) \times 4$  sorts of  $S(n-1)$ . The second lookup table was defined to have  $4 \times 4$  cases of 4 sorts of  $M(n) \times 4$  sorts of  $S(n+1)$ . However, the size of the lookup table is not limited to the  $4 \times 4$  cases but may be set at any cases other than  $1 \times 1$  to realize the effects of the present invention. Further, although each of the first and second lookup tables forms a two-dimensional table in the

present embodiment, it may advantageously be a three-dimensional table based on a combination of three parameters of  $S(n-1)$ ,  $M(n)$  and  $S(n+1)$  or may be multi-dimensional table. The simplicity and/or complexity of the table may be suitably determined by various factors including characteristics of a recording medium and a demanded recording accuracy. When a DVD-RAM having a memory capacity of 4.7GB for one side is used as an example, its lookup table is desirably a two dimensional table having a size of about  $3 \times 3$ ,  $4 \times 3$ ,  $3 \times 4$  or  $4 \times 4$ .

**[0051]** Now explanation will be made as to mark edge controllability in connection with the cases 1 and 4 as an example. Several experimental results are shown herein. In this connection, their experimental conditions are set so that a linear speed is about 8m/sec.,  $T$  is about 17nsec., a 3T mark as the shortest mark has a physical length of about  $0.4\mu\text{m}$  or slightly more, a track pitch is about  $0.6\mu\text{m}$ , a peak power is 11mW, the bias power 1 is 4.5mW, the bias power 2 is 3.5mW and the bias power 3 is 1mW.

**[0052]** A single mark having a specific length is recorded always under the same conditions, which is referred to as the anchor mark. Following a space (corresponding to an area having no recorded mark between adjacent recording marks) subsequent to the anchor mark, a mark to be measured (which will be sometimes referred to as the measurement mark) is recorded. A recording pulse for the measurement mark is controlled according to the above case 1 or 4. A reproduction signal obtained by reproducing the anchor mark and measurement mark is digitized into predetermined slice levels to obtain a binary data signal. The binary data signal is used to measure a time interval (leading edge interval) from the leading edge of the anchor mark to the leading edge of the measurement mark. Further, the binary data signal is used to measure a time interval (trailing edge interval) from the trailing edge of the anchor mark to the trailing edge of the measurement mark.

**[0053]** Shown in Fig. 2A are variations in the leading edge interval and shown in Fig. 2B are variation in the trailing edge interval when the tail pulse position is stationary while the head pulse position varies in the case **[0054]** 4. In the drawings, their plus directions of axes are time advancing directions. In the drawings, the lengths of the measurement mark are used as parameters. In Fig. 2A, the head pulse position and mark leading edge position are in a nearly linearly proportional relationship. In Fig. 2B, on the other hand, as the head pulse position moves, the trailing edge correspondingly moves. A movement of the trailing edge amounts even to about 50% of a movement of the head pulse position.

**[0055]** Shown in Fig. 3A are variations in the trailing edge interval and shown in Fig. 3A are variation in the leading edge interval when the head pulse position is stationary while the tail pulse position varies in the case 4. In the drawings, their plus directions of axes are time advancing directions. In the drawings, the lengths of the

measurement mark are used as parameters. In Fig. 3A, the tail pulse position and mark trailing edge position are in a nearly linearly proportional relationship. In Fig. 3B, on the other hand, as the tail pulse position moves, the leading edge correspondingly moves. A movement of the leading edge amounts even to about 50% of a movement of the tail pulse position.

**[0056]** Shown in Fig. 4A are variations in the leading edge interval and shown in Fig. 4B are variations in the trailing edge interval when the tail pulse rising and falling positions are stationary while the head pulse rising position varies in the case 1. In the drawings, their plus directions of axes are time advancing directions. In the drawings, the lengths of the measurement mark are used as parameters. In Fig. 4A, the head pulse rising edge position and mark leading edge position are in a nearly linearly proportional relationship. In Fig. 4B, on the other hand, even when the leading edge position of the head pulse moves, this causes substantially no remarkable movement of the mark trailing edge position at least in a range where the leading edge position of the head pulse less varies.

**[0057]** Shown in Fig. 5A are variations in the trailing edge interval and shown in Fig. 5B are variations in the leading edge interval when the rising and falling edge positions of the head pulse are stationary while the falling edge position of the tail pulse varies in the case 1. In the drawings, their plus directions of axes are time advancing directions. In the drawings, the lengths of the measurement mark are used as parameters. In Fig. 5A, the tail pulse falling edge position and mark trailing edge position are in a nearly linearly proportional relationship. In Fig. 5B, on the other hand, even when the trailing edge position of the tail pulse moves, this causes substantially no remarkable movement of the mark leading edge position at least in a range where the trailing edge position of the tail pulse less varies.

**[0058]** When comparison is carried out between the case 4 of Figs. 2A, 2B and 3A, 3B and the case 1 of Figs. 4A, 4B and 5A, 5B, it will be noted from the experimental results shown herein that the case 1 is more preferable with respect to the recording medium and recording strategy used in the experiments. This is because, in the case 1, the leading edge position of the record mark can be controlled independently only by the rising edge position of the head pulse in the recording pulse, and the trailing edge position of the recording medium can be controlled independently only by the falling edge position of the tail pulse in the recording pulse. The case 4 is more deteriorated in the control independency and more difficult in the control than the case 1.

**[0059]** Although the case 1 is more preferable than the case 4 with respect to the recording medium and recording strategy used in the experiments, there is a case where the case 4 is more preferable than the case 1 depending on the design of the recording medium. More specifically, in the case 1, the energy per se possessed by the head or tail pulse is increased or de-

creased, so that, when the energy of the head or tail pulse is excessively increased, this results in deterioration of overwrite or cross-erase characteristics. In the case 4, on the other hand, since the energy possessed by the entire recording pulse train varies only slightly, there is no likelihood of deterioration of such overwrite or cross-erase characteristics. It goes without saying that, when sufficient margins are given to overwrite or cross-erase characteristics in the design of the recording medium, there can be designed a recording medium without any possibility of deterioration of the overwrite or cross-erase characteristics even in the case 1.

**[0060]** Explanation will then be made as to another embodiment of the present invention with reference to Fig. 6 showing an information storage apparatus in the form of a block diagram. For the convenience of explanation, a recording medium 100 is illustrated as mounted in the information storage apparatus. For the purpose of storing information, the recording medium 100 is indispensable, but it may be dismounted from the information storage apparatus or be mounted thereinto as necessary.

**[0061]** In Fig. 6, a chucking mechanism 112 is mounted to a rotary shaft 111 of a motor 110 attached to a casing 108 so that the chucking mechanism 112 holds a recording medium 100. The chucking mechanism 112 acts to hold the recording medium 100. The motor 110, rotary shaft 111 and chucking mechanism 112 form a mechanism for relatively moving the recording medium 100 and an energy beam.

**[0062]** Mounted to the casing 108 is a rail 115. A rail guide 116 guided by the rail 115 is mounted to a case 117. Also mounted to the case 117 is a linear gear 119, to which a rotary gear 120 is mounted. Transmission of rotation of the rotating motor 118 mounted on the casing 108 to the rotary gear 120 causes linear movement of the case 117 along the rail 115. The linear movement is directed toward nearly the radial direction of the recording medium 100.

**[0063]** Mounted to the case 117 is a magnet 121. Also mounted to the case 117 is an objective lens 130 through a suspension 123 which can be moved only in two directions, that is, in a direction of nearly a normal of the recording surface of the recording medium 100 and in a nearly radial direction of the recording medium 100. Mounted onto the objective lens 130 is a coil 122 as nearly opposed to a magnet 121. When a current flows through the coil 122, its magnetic effect causes the objective lens 130 to be able to move in two directions of the direction of nearly a normal of the recording surface of the recording medium 100 and the nearly radial direction of the recording medium 100. The rail 115, rail guide 116, case 117, magnet 121, suspension 123, coil 122 and objective lens 130 form a mechanism which positions the energy beam at a predetermined position on the recording medium 100.

**[0064]** Mounted to the case 117 is a semiconductor laser 131 as an energy beam generator. The energy



beam emitted from the semiconductor laser 131 passes through a collimating lens 132 and a beam splitter 133 and then through the objective lens 130. Part of the light emitted from the objective lens 130 is reflected by the recording medium 100, passed through the objective lens 130, reflected by the beam splitter 133, condensed by a detection lens 134, and then an intensity of the reflected light is then detected by a photodetector 135. More in detail, the photodetector 135 has a plurality of divided light receiving areas. Intensities of light detected on the respective areas are amplified and calculated by an amplifier 152 to detect information (servo signal) indicative of a relative positional relationship between a light spot focused by the objective lens 130 and the recording medium 100 as well as an information read signal. The servo signal is sent from the amplifier to a servo controller 151, whereas the read signal is sent from the amplifier to a decoder 153.

**[0065]** When the recording medium 100 is loaded into the information storage apparatus and the chucking mechanism 112 fixedly holds the recording medium 100, a detector 140 detects the presence of the medium and sends a signal indicative of the medium presence to a system controller 150. The system controller 150, when receiving the signal, controls the motor 110 in such a manner that the recording medium 100 is rotated at a suitable rotational speed. The system controller 150 also controls a rotating motor 118 in such a manner that the case 117 is located at a suitable position. The system controller 150 also causes the semiconductor laser 131 to controllably emit light, and also causes a servo controller 151 to be operated so that the rotating motor 118 is driven or a current flows through the coil 123 to position the light spot focused by the objective lens 130 at a predetermined position on the recording medium 100. The servo controller 151 then sends a signal indicative of the focused spot formed on the recording medium 100 to the system controller 150. The system controller 150, when receiving the signal, sends an instruction to a decoder 153 to decode the read signal therein. When a read track is not an information track in the control data zone, the system controller 150 sends an instruction to the servo controller 151 such that the focused spot is positioned at an information track in the control data zone. As a result of the above operation, the system controller 150 reads the information track of the control data zone and reads out medium information recorded therein.

**[0066]** Written in the information track of the control data zone are such recording strategy parameters as already explained in connection with Fig. 1. That is, the system controller 150 reads out from the recording medium 100 information on the recording power level, time relations between recording pulses, lookup table, and the adaptive control set to any of the cases 1 to 8. The system controller 150 writes these recording strategy parameters in a parameter table of a signal processing circuit 154, a parameter table of a timing controller or

delay circuit 155, and a current sink parameter of current sinks 156. The operations of the cases 1 to 8 explained in Fig. 1 can be realized by changing the writing method into the table of the delay circuit 155 depending on the selection of the cases 1 to 8 or by switching switches of a delay circuit 155. Incorporated in the delay circuit 155 are first to fourth timing adjusting means. Also incorporated in the delay circuit 155 is a first change-over mechanism for switching between the first and second timing adjusting means. Further incorporated in the delay circuit 155 is a second change-over mechanism for switching between the third and fourth timing adjusting means.

**[0067]** The timing of the system controller 150 of reading the recording strategy parameters from the recording medium 100 and writing these parameters in the parameter table of the signal processing circuit 154, the parameter table of the delay circuit 155 and the current sink parameter of the current sinks 156 may be set only when the recording medium 100 is put in its writable state. For example, when the recording medium 100 is placed in its write protect state, as when a write protect switch provided on a case of the recording medium 100 is set at its write protect position or as when an upper-level controller of the information storage apparatus issues a write protect command; a series of operations such as the reading of the recording strategy parameters can be omitted. For the purpose of detecting a write protect switch, the detection switch 141 is mounted to the casing 108 and sends its detected signal to the system controller. In the recording protection mode, a preparation time taken after the loading of the recording medium 100 in the chucking mechanism 112 until the medium reaches its reproducible state can be shortened by stopping the reading of the recording strategy parameters.

**[0068]** When receiving an information reproduction command from the upper-level controller through the input connector 159, the system controller 150 issues a command to the servo controller 151 to position the focused spot at a suitable position on the recording medium 100, a signal obtained from the photodetector 135 is decoded by the decoder 153 to obtain read information, and then the read information is sent from the decoder 153 through an output connector 158 to the upper-level controller.

**[0069]** When receiving an information write command and write information (to be written) from the upper-level controller via an input connector 159, the system controller 150 issues a command to the servo controller 151 to position the focused spot at a suitable position on the recording medium 100. Further, the write information is converted by the signal processing circuit 161 to an NRZI signal. The converted NRZI signal is converted by the signal processing circuit 154 to a suitable train of a plurality of pulses. The pulse train is passed through the delay circuit 155 and transmitted to the current sinks 156. In the illustrated example, the signal processing circuit 154 and signal processing circuit 161 form a signal



processing circuit which converts the write signal to the recording pulse trains.

**[0070]** A fixed current controller 157 is connected to the semiconductor laser 131 so that a total of currents consumed by the semiconductor laser 131 and current sinks 156 has always a constant value. The plurality of current sinks 156 are connected to the fixed current controller 157. Whether or not the current sinks 156 are operated to absorb the current depends on the signal generated by the signal processing circuit 154 and passed through the delay circuit 155. When the current sinks 156 are operated, a part of the current issued from the fixed current controller 157 is absorbed by the current sinks 156, resulting in reduction of a current flowing into the semiconductor laser 131. This causes the energy level of the energy beam emitted from the semiconductor laser 131 to be varied. The signal processing circuit 154 and delay circuit 155 realize such a recording strategy as shown in Fig. 1 when the plurality of current sinks 156 are operated with suitable timing.

**[0071]** For the above operation, power is externally supplied to the information storage apparatus via a terminal 160.

**[0072]** As has been explained in the foregoing, recording is carried out as modified according to the cases 1 to 8, so that, even when such high-density recording is carried out as the shortest mark length is the recording spot radius or less, the information recording can advantageously be carried out independently of the characteristics of the recording medium and with good compatibility and good stability. Further, since the present invention uses such a recording medium as to be able to record information about selection of any of the cases 1 to 8 in the information track of the control data zone on the recording medium, there is provided a recording medium which can record information with a high density independently of fluctuations in recording characteristics of the information storage apparatus always with good stability and compatibility.

**[0073]** Further, since the information about selection of any of the cases 1 to 8 is read out from the recording medium 100 and is used to reflect it on the state of the information storage apparatus, there are provided a recording method and an information storage apparatus which can record information always with good stability, and compatibility and with a high density.

**[0074]** In accordance with the foregoing embodiments, even when such high-density recording is carried out as the shortest recording mark length is the recording spot radius or less, information can be recorded on a recording medium independently of characteristics of the recording medium or on characteristics of the information storage apparatus, always with good compatibility and stability.

## Claims

1. An information recording method wherein a single recording mark is formed on a recording medium (100) with use of a train of a plurality of energy beam pulses, and any of a first case where a falling edge timing of a head pulse in said energy beam pulse train is substantially stationary while a rising edge timing thereof is varied and a second case where the rising and falling edge timings of said head pulse are varied, is used to record information on the basis of control data previously recorded on said recording medium.
2. An information recording method wherein a single recording mark is formed on a recording medium (100) with use of a train of a plurality of energy beam pulses, and any of a first case where a rising edge timing of a tail pulse in said energy beam pulse train is substantially stationary while a falling edge timing thereof is varied and a second case where the rising and falling edge timings of said tail pulse are varied, is used to record information on the basis of control data previously recorded on said recording medium.
3. An information recording method as set forth in claim 1 or 2, wherein an interval between said rising and falling edge timings is a substantially constant time in said second case.
4. An information recording method as set forth in any of claims 1 to 3, wherein said recording medium (100) is rewritable.
5. An information recording method as set forth in any of claims 1 to 4, wherein said recording medium (100) is of a phase transition type.
6. An information recording apparatus comprising:
  - an energy beam generator (131);
  - a power adjustment mechanism for adjusting a power level of an energy beam generated by said energy beam generator;
  - a holder mechanism (112) for holding a recording medium (100);
  - a movement mechanism (112) for relatively moving said energy beam and said recording medium;
  - a signal processing circuit (154) for changing information to be recorded to the power level of said energy beam;
  - first timing adjustment means for causing said power adjustment mechanism to control said energy beam generator to generate a train of a plurality of energy beam pulses from the generator, for substantially fixing a falling edge tim-

ing of a head pulse in said energy beam pulse train, and at the same time for changing a rising edge timing thereof on the basis of control data previously recorded on said recording medium at time of forming a single recording medium on said recording medium; and  
 second timing adjustment means for changing the rising and falling edge timings of said head pulse.

7. An information recording apparatus comprising: an energy beam generator (131);

a power adjustment mechanism for adjusting a power level of an energy beam generated by said energy beam generator;  
 a holder mechanism (112) for holding a recording medium (100);  
 a movement mechanism (112) for relatively moving said energy beam and said recording medium;  
 a signal processing circuit (154) for changing information to be recorded to the power level of said energy beam;  
 first timing adjustment means for causing said power adjustment mechanism to control said energy beam generator to generate a train of a plurality of energy beam pulses from the generator, for substantially fixing a rising edge timing of a tail pulse in said energy beam pulse train, and at the same time for changing a falling edge timing thereof on the basis of control data previously recorded on said recording medium at time of forming a single recording medium on said recording medium; and  
 second timing adjustment means for changing the rising and falling edge timings of said tail pulse.

8. An information recording method having recording methods 1 and 2 for recording information on a recording medium (100) using any one or both of said recording methods 1 and 2, wherein said recording medium can be formed to have a first state zone with a first power level of an energy beam and to have a second state zone with a second power level of the energy beam higher than said first power level, information recording on the recording medium is carried out by relatively moving said energy beam and said recording medium to irradiate said energy beam on said recording medium and to form said first and second state zones with predetermined lengths and with a predetermined spacing therebetween on said recording medium, a third power level lower than said second power level is provided, and at the time of forming said second state zone having a specific length on said recording medium, a duration of said third power level is included as mixed in

a duration of said second power level to convert said energy beam to a multi-pulsed train, said energy beam of the multi-pulsed train is irradiated on said recording medium, and wherein, in said recording method, change-over is carried out as necessary between a first timing adjustment method for changing an energy level rising edge timing of a head pulse in said multi-pulsed energy beam train according to combinations of pieces of information to be recorded and for substantially fixing an energy level falling edge timing of said head pulse and a second timing adjustment method for changing an energy level rising edge timing of the head pulse in said multi-pulsed energy beam train according to combinations of pieces of information to be recorded and for changing the energy level falling edge timing of said head pulse according to the combinations of pieces of information to be recorded, to thereby irradiate said energy beam on said recording medium for recording, and wherein, said second recording method, change-over is carried out as necessary between a third timing adjustment method for changing an energy level falling edge timing of a tail pulse in said multi-pulsed energy beam train according to the combinations of pieces of information to be recorded and for substantially fixing an energy level rising edge timing of said tail pulse and a fourth timing adjustment method for changing the energy level falling edge timing of the tail pulse in said multi-pulsed energy beam train according to the combinations of pieces of information to be recorded and for changing the energy level rising edge timing of said tail pulse according to the combinations of pieces of information to be recorded, to thereby irradiate said energy beam on said recording medium for recording.

9. An information recording method as set forth in claim 8, wherein said third power level is equal to or lower than said second power level, a fourth power level equal to or lower than said second power level is provided, said fourth power level is equal to or higher than said third power level, said energy beam having said fourth power level following said tail pulse of said multi-pulsed train is irradiated onto said recording medium.
10. An information recording method as set forth in claim 9, wherein a time during which said fourth power level is maintained is kept always substantially constant regardless of a timing adjustment of said tail pulse of said energy beam pulse train and timing adjustment means.
11. A recording medium wherein said recording medium can be formed to have a first state zone with a first power level of an energy beam and to have a second state zone with a second power level of the

energy beam higher than said first power level, a first timing adjustment method is used for changing an energy level rising edge timing of a head pulse in said multi-pulsed energy beam train according to combinations of pieces of information to be recorded and for substantially fixing an energy level falling edge timing of said head pulse, a second timing adjustment method is used for changing an energy level rising edge timing of the head pulse in said multi-pulsed energy beam train according to combinations of pieces of information to be recorded and for changing the energy level falling edge timing of said head pulse according to the combinations of pieces of information to be recorded, a third timing adjustment method is used for changing an energy level falling edge timing of a tail pulse in said multi-pulsed energy beam train according to the combinations of pieces of information to be recorded and for substantially fixing an energy level rising edge timing of said tail pulse, a fourth timing adjustment method is used for changing the energy level falling edge timing of the tail pulse in said multi-pulsed energy beam train according to the combinations of pieces of information to be recorded and for changing the energy level rising edge timing of said tail pulse according to the combinations of pieces of information to be recorded, first information indicates which of said first and second timing adjustment methods is to be selected, second information indicates which of said third and fourth timing adjustment methods is to be selected, said recording medium has a zone or zones in which any one or both of said first and second information are recorded therein as medium information, or any one or both of said first and second information can be written in said recording medium as the medium information.

12. An information recording apparatus comprising:

an energy beam generator (131);  
 a power adjustment mechanism for setting a power level of an energy beam generated by said energy beam generator at a first power level and at a second power level higher than said first power level;  
 a holder mechanism (112) for holding a recording medium (100) having a first state zone settable with said first power level and a second state zone settable with said second power level;  
 a movement mechanism (112) for relatively moving said energy beam and said recording medium;  
 a positioning mechanism for positioning said energy beam at a predetermined location on said recording medium for irradiation;  
 a signal processing circuit (154) for changing

information to be recorded to the power level of said energy beam, said power adjustment mechanism having a function of setting the power level of said energy beam at a third power level lower than said second power level and at the time of forming said second state zone having a specific length on said recording medium, of mixedly including a duration of said third power level in a duration of said second power level to convert said energy beam to a multi-pulsed train;

first timing adjustment means for changing an energy level rising edge timing of a head pulse in said multi-pulsed energy beam train according to combinations of pieces of information to be recorded and for substantially fixing an energy level falling edge timing of said head pulse;

second timing adjustment means for changing an energy level rising edge timing of the head pulse in said multi-pulsed energy beam train according to combinations of pieces of information to be recorded and for changing the energy level falling edge timing of said head pulse according to the combinations of pieces of information to be recorded;

third timing adjustment means for changing an energy level falling edge timing of a tail pulse in said multi-pulsed energy beam train according to the combinations of pieces of information to be recorded and for substantially fixing an energy level rising edge timing of said tail pulse; fourth timing adjustment means for changing the energy level falling edge timing of the tail pulse in said multi-pulsed energy beam train according to the combinations of pieces of information to be recorded and for changing the energy level rising edge timing of said tail pulse according to the combinations of pieces of information to be recorded;

first change-over means for performing switching between said first and second timing adjustment means as necessary; and

second change-over means for performing switching between said third and fourth timing adjustment means as necessary.

13. An information recording apparatus as set forth in claim 12, wherein any one or both of said first and second change-over mechanisms are operated according to a result of said medium information read out from said recording medium.

14. An information recording apparatus as set forth in claim 12 or 13, wherein said third power level is equal to or lower than said second power level, a fourth power level equal to or lower than said second power level is provided, said fourth power level

is equal to or higher than said third power level, said energy beam having said fourth power level following said tail pulse of said multi-pulsed train is irradiated onto said recording medium.

15. An information recording apparatus as set forth in claim 14, wherein a time during which said fourth power level is maintained is kept always substantially constant regardless of a timing adjustment of said tail pulse of said energy beam pulse train and timing adjustment means.

16. An information recording method including at least one of methods 1 and 2 and using a recording medium (100) capable of forming a first state zone with a first power level of an energy beam and a second state zone with a second power level of the energy beam higher than said first power level, wherein said energy beam and said recording medium are relatively moved to irradiate said energy beam on said recording medium and to form said first and second state zones with predetermined lengths and with a predetermined spacing therebetween on said recording medium to record information on said recording medium, a third power level lower than said second power level is provided, and at the time of forming said second state zone having a specific length on said recording medium, a duration of said third power level is included as mixed in a duration of said second power level to convert said energy beam to a multi-pulsed train and to irradiate said energy beam on said recording medium, said method 1 substantially fixes a falling edge position of a head pulse in said multi-pulsed train and moves a rising edge position thereof at the time of forming said second state zone having a specific length, said method 2 substantially fixes a rising edge position of a tail pulse of said multi-pulsed train and moves a falling edge position thereof at the time of forming said second state zone having the specific length, a fourth power level equal to or lower than said first power level is provided, the power level of the energy beam following the tail pulse of said multi-pulsed train is kept at said fourth power level for a predetermined time and then kept at said first power level, and a time during which said fourth power level is kept is always constant regardless of the falling edge position of said tail pulse.

17. An information recording method as set forth in claim 16, wherein the rising edge position of said head pulse is adjusted according to both of the length of said second state zone being now formed by said multi-pulse train and the length of said first state zone adjacent to said second state zone and formed just before said second state zone.

18. An information recording method as set forth in

claim 16, wherein the falling edge position of said tail pulse is adjusted according to both of the length of said second state zone being now formed by said multi-pulse train and the length of said first state zone adjacent to said second state zone and formed just after said second state zone.

19. An information recording apparatus comprising:

an energy beam generator (131);  
a power adjustment mechanism for setting a power level of an energy beam generated by said energy beam generator at a first power level and at a second power level higher than said first power level;  
a holder mechanism (112) for holding a recording medium (100) having a first state zone settable with said first power level and a second state zone settable with said second power level;  
a movement mechanism (112) for relatively moving said energy beam and said recording medium;  
a positioning mechanism for positioning said energy beam at a predetermined location on said recording medium for irradiation;  
a signal processing circuit (154) for changing information to be recorded to the power level of said energy beam, said power adjustment mechanism having a function of setting the power level of said energy beam at a third power level lower than said second power level and at the time of forming said second state zone having a specific length on said recording medium, of mixedly including a duration of said third power level in a duration of said second power level to convert said energy beam to a multi-pulsed train;  
first timing adjustment means for changing an energy level rising edge timing of a head pulse in said multi-pulsed energy beam train according to combinations of pieces of information to be recorded and for substantially fixing an energy level falling edge timing of said head pulse;  
second timing adjustment means for changing an energy level rising edge timing of the head pulse in said multi-pulsed energy beam train according to combinations of pieces of information to be recorded and for changing the energy level falling edge timing of said head pulse according to the combinations of pieces of information to be recorded; and  
change-over means for performing switching between said first and second timing adjustment means as necessary.

20. An information recording apparatus comprising:

an energy beam generator (131);  
a power adjustment mechanism for setting a  
power level of an energy beam generated by  
said energy beam generator at a first power level and at a second power level higher than said  
first power level; 5  
a holder mechanism (112) for holding a recording medium (100) having a first state zone settable with said first power level and a second state zone settable with said second power level; 10  
a movement mechanism (112) for relatively moving said energy beam and said recording medium;  
a positioning mechanism for positioning said energy beam at a predetermined location on said recording medium for irradiation; 15  
a signal processing circuit (154) for changing information to be recorded to the power level of said energy beam, said power adjustment mechanism having a function of setting the power level of said energy beam at a third power level lower than said second power level and at the time of forming said second state zone having a specific length on said recording medium, of mixedly including a duration of said third power level in a duration of said second power level to convert said energy beam to a multi-pulsed train; 20  
first timing adjustment means for changing an energy level falling edge timing of a tail pulse in said multi-pulsed energy beam train according to combinations of pieces of information to be recorded and for substantially fixing an energy level rising edge timing of said tail pulse; 25  
second timing adjustment means for changing an energy level falling edge timing of the tail pulse in said multi-pulsed energy beam train according to combinations of pieces of information to be recorded and for changing the energy level rising edge timing of said tail pulse according to the combinations of pieces of information to be recorded; and 30  
change-over means for performing switching between said first and second timing adjustment means as necessary. 35  
40  
45

50

55

Fig 1



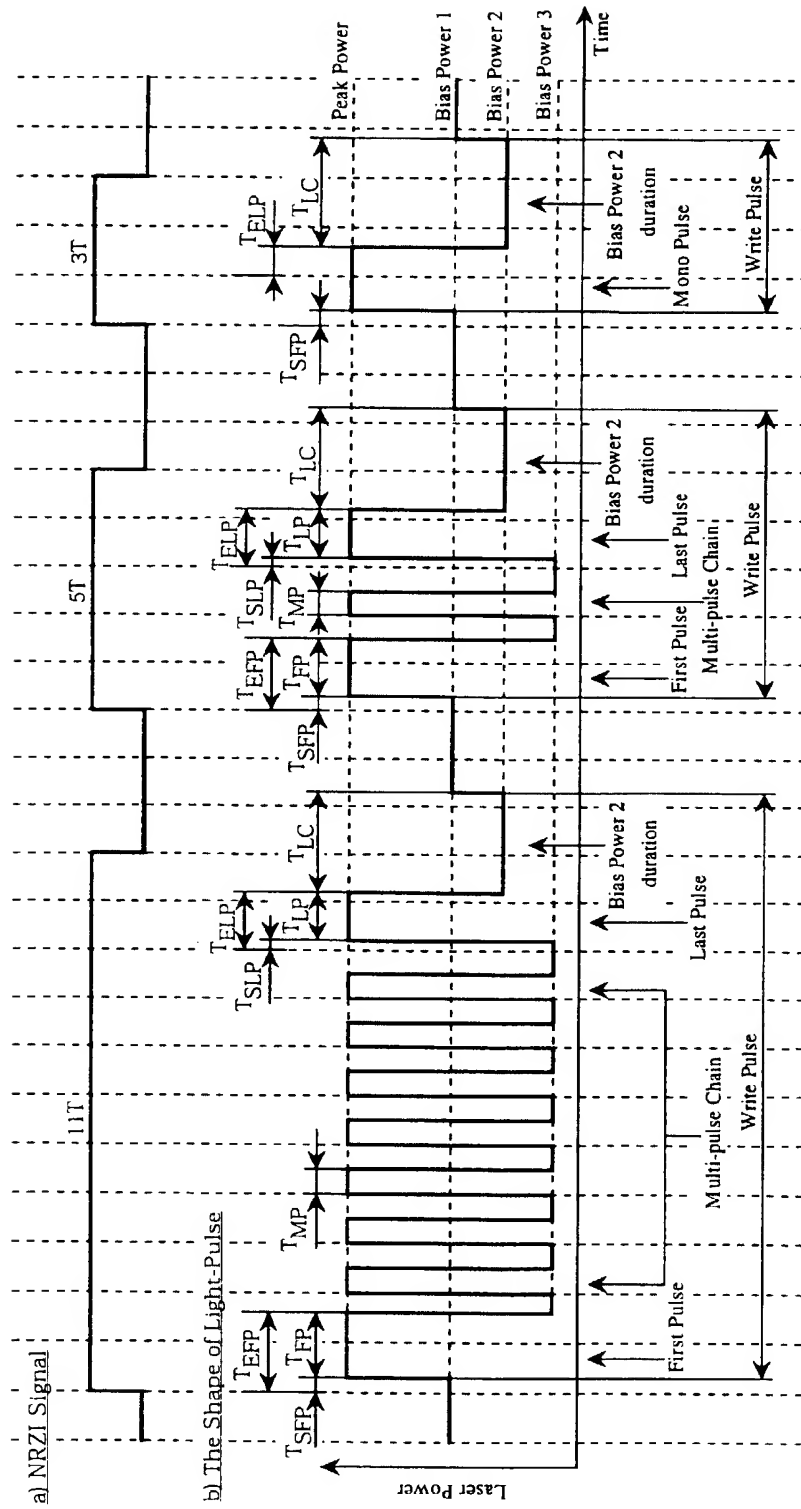


Fig.2A

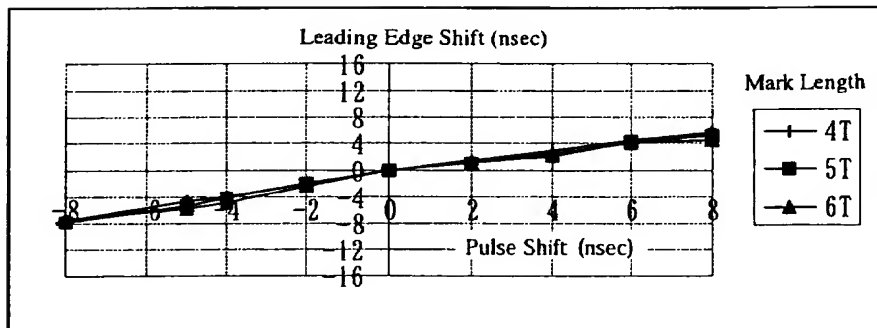

Leading Edge Shift with Leading Pulse Shift


Fig.2B

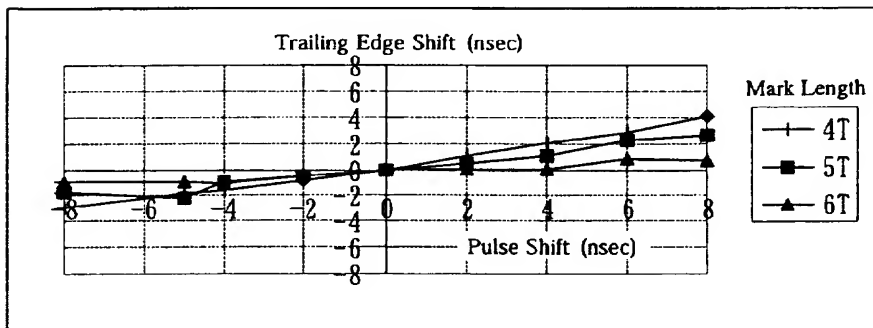

Trailing Edge Shift with Leading Pulse Shift




Fig.3A

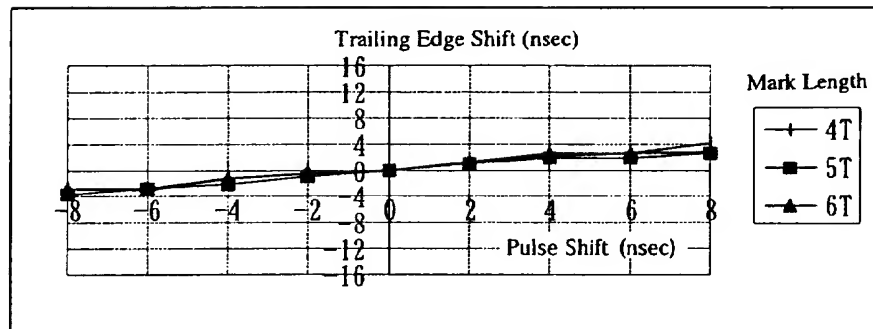


Trailing Edge Shift with Trailing Pulse Shift

Fig.3B

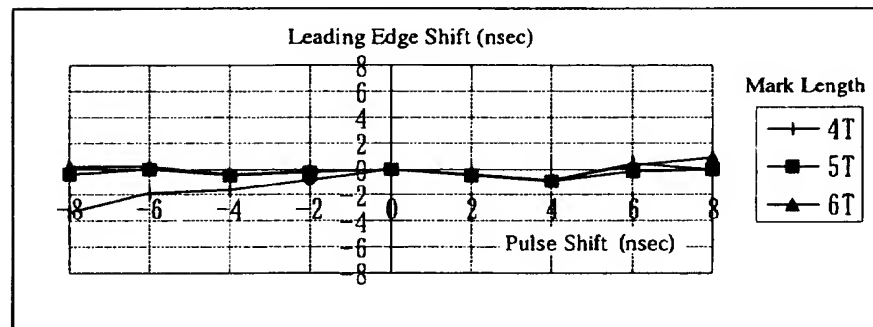


Leading Edge Shift with Trailing Pulse Shift

Fig.4A

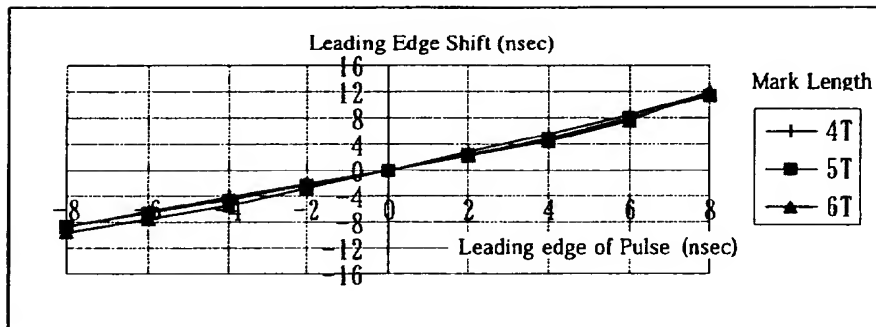


Leading Edge Shift with Variable Leading Edge of Pulse,  
and with Fixed Trailing Edge of Pulse

Fig.4B

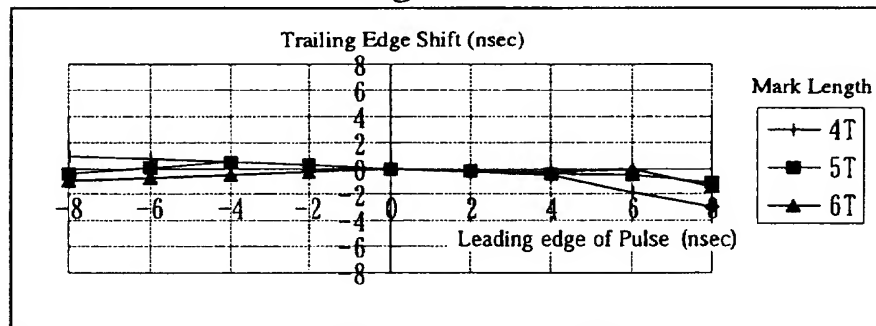


Trailing Edge Shift with Variable Leading Edge of Pulse,  
and with Fixed Trailing Edge of Pulse

Fig.5A

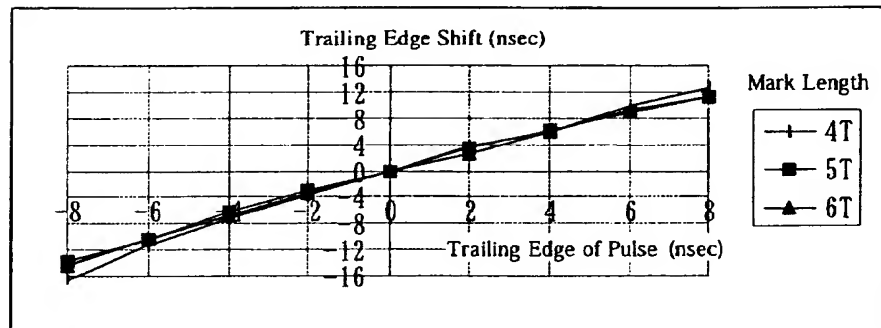


Trailing Edge Shift with valuable Trailing Edge of Pulse,  
and with fixed Leading Edge of Pulse

Fig.5B

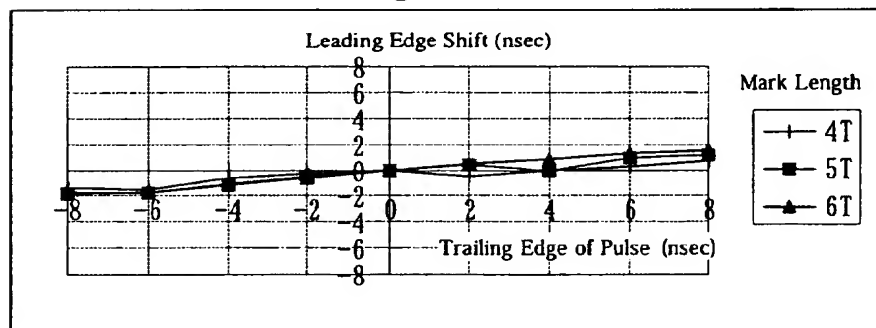

Leading Edge Shift with valuable Trailing Edge of Pulse,  
and with fixed Leading Edge of Pulse

Fig. 6

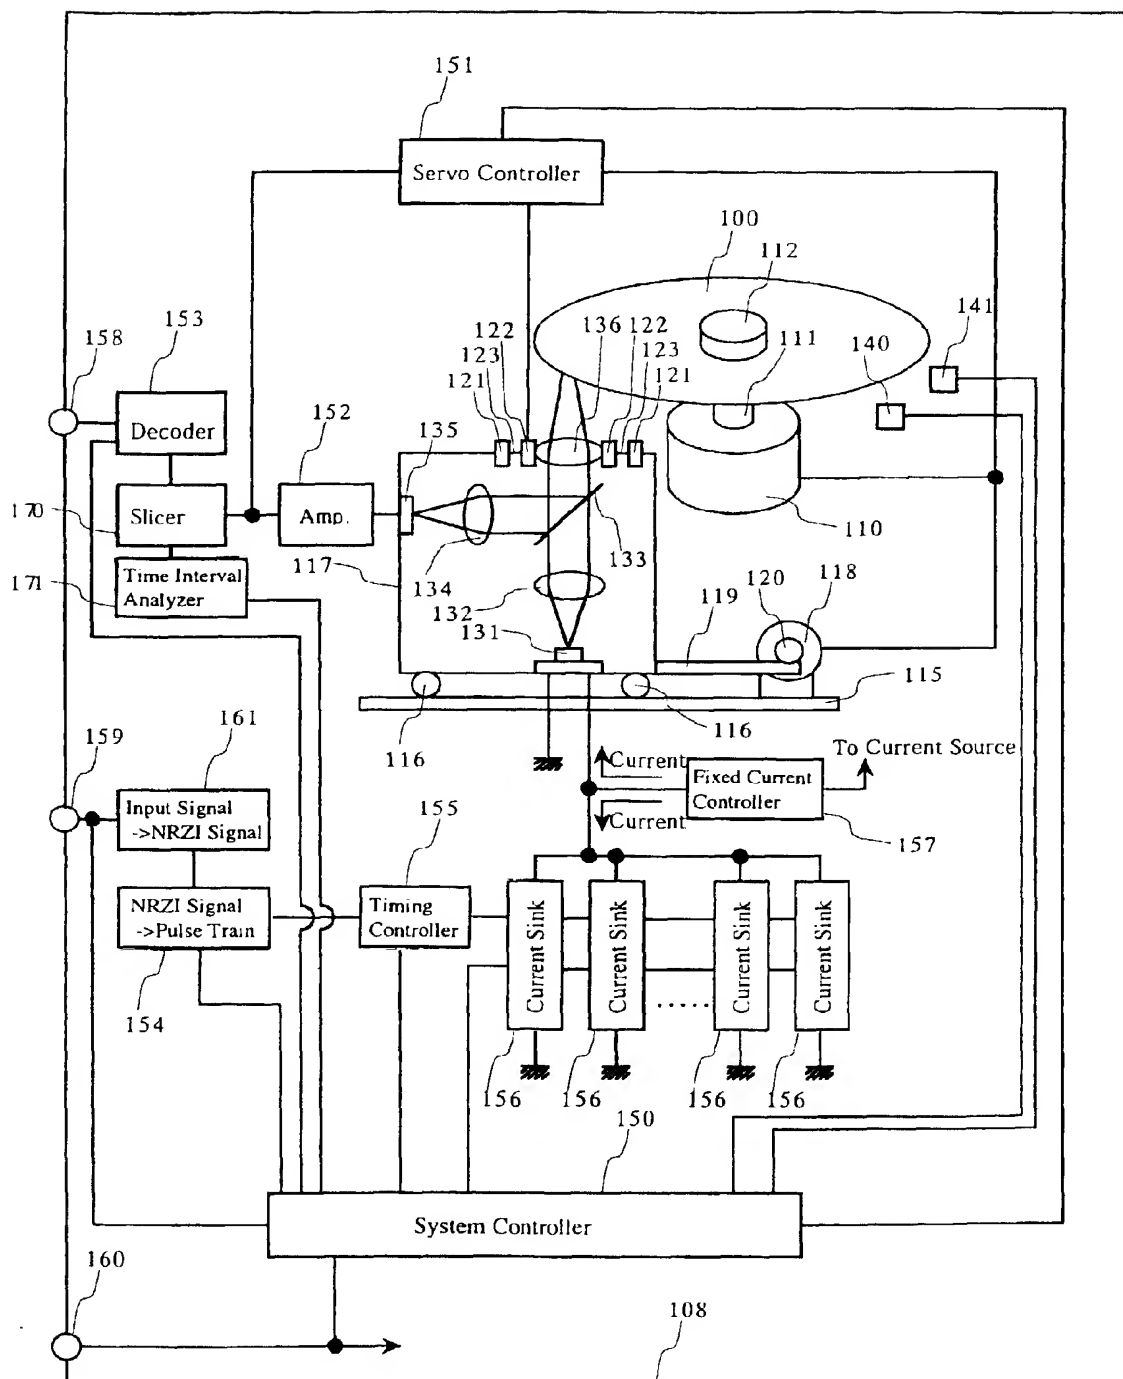



(11) **EP 0 978 827 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
**10.01.2001 Bulletin 2001/02**

(51) Int Cl.7: **G11B 7/125, G11B 7/00**

(43) Date of publication A2:  
**09.02.2000 Bulletin 2000/06**

(21) Application number: **99306165.4**

(22) Date of filing: **03.08.1999**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

- **Sukeda, Hirofumi**  
**Tokorozawa-shi (JP)**
- **Minemura, Hiroyuki**  
**Kokubunji-shi (JP)**
- **Kando, Hidehiko**  
**Matsudo-shi (JP)**
- **Miyamoto, Makoto**  
**Ome-shi (JP)**

(30) Priority: **04.08.1998 JP 22009798**  
**01.09.1998 JP 24674498**

(71) Applicant: **HITACHI, LTD.**  
**Chiyoda-ku, Tokyo (JP)**


(74) Representative: **Calderbank, Thomas Roger et al**  
**MEWBURN ELLIS**  
**York House**  
**23 Kingsway**  
**London WC2B 6HP (GB)**

(72) Inventors:  
• **Maeda, Takeshi**  
**Kokubunji-shi (JP)**

(54) **Information recording method, information recording medium and information recording apparatus**

(57) Optimum edge recording methods are previously held in a control data zone on the recording medium (100), and one of the methods is selected in a write mode by referring to the recorded methods. An information recording apparatus for forming a recording mark by converting an energy beam to a multi-pulsed train and irradiating the beam onto the recording medium (100) includes that change-over can be realized between mark edge control based on control of both pulse edge positions and mark edge control based on control of one of the pulse edge positions.

Fig. 6

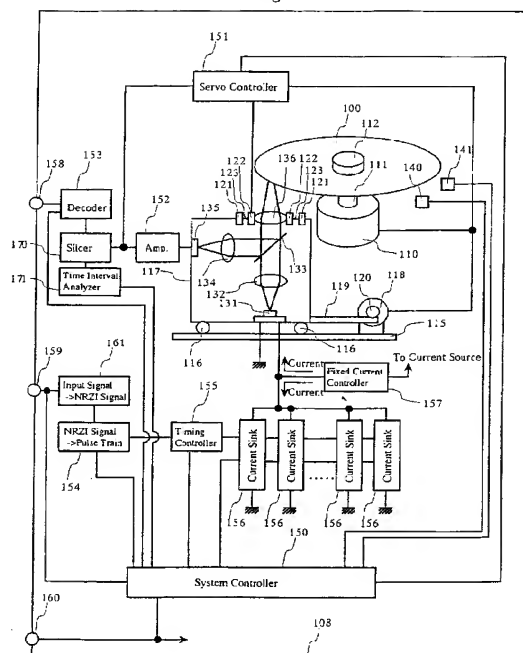



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 99 30 6165

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 5 642 343 A (IDE HIROSHI ET AL) 24 June 1997 (1997-06-24) * abstract; figures 23,24 * * column 25, line 11 - column 25, line 46 *	1-20	G11B7/125 G11B7/00
A	EP 0 797 193 A (MATSUSHITA ELECTRIC IND CO LTD) 24 September 1997 (1997-09-24) * abstract; figures 4-15 * * page 7, line 3 - page 8, line 34 * * page 23, line 20 - page 33, line 2 *	1-20	
A	US 5 499 227 A (HIGASA MASASHI) 12 March 1996 (1996-03-12) * abstract; figures 2-4 * * column 3, line 64 - column 5, line 38 *	1-20	
A	WO 97 30440 A (SPRUIT JOHANNES HENDRIK MARIA ; PHILIPS ELECTRONICS NV (NL); PHILIP) 21 August 1997 (1997-08-21) * abstract; figures 1A-4C * * page 5, line 19 - page 11, line 20 *	1-20	
A	US 5 703 855 A (SUGIYAMA HISATAKA ET AL) 30 December 1997 (1997-12-30) * abstract; figures 1A-D,10,13 * * column 18, line 25 - column 21, line 62 *	1-20	
E	EP 0 933 759 A (SONY CORP) 4 August 1999 (1999-08-04) * abstract * * page 2, line 10 - line 20; figure 1 * * page 4, line 39 - page 5, line 29; figures 6A-6H *	1,2	
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>20 November 2000</b>	Examiner <b>Pariset, N</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.85 (P04/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 6165

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-11-2000

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5642343	A	24-06-1997	JP 2915098 B	05-07-1999
			JP 4061028 A	27-02-1992
			JP 3063314 B	12-07-2000
			JP 5135363 A	01-06-1993
			JP 5298737 A	12-11-1993
			US 5513165 A	30-04-1996
			US 5590111 A	31-12-1996
			US 5345434 A	06-09-1994
			US 5732061 A	24-03-1998
			US 5418770 A	23-05-1995
			DE 4293957 C	26-02-1998
			DE 4293957 T	31-07-1997
			WO 9310527 A	27-05-1993
			JP 5290437 A	05-11-1993
EP 0797193	A	24-09-1997	CN 1173941 A	18-02-1998
			CN 1250210 A	12-04-2000
			CN 1250211 A	12-04-2000
			EP 1018727 A	12-07-2000
			EP 1020850 A	19-07-2000
			EP 0991058 A	05-04-2000
			EP 0991059 A	05-04-2000
			WO 9714143 A	17-04-1997
			JP 2000048366 A	18-02-2000
			US 5745467 A	28-04-1998
US 5499227	A	12-03-1996	JP 2643780 B	20-08-1997
			JP 7037250 A	07-02-1995
WO 9730440	A	21-08-1997	AU 1554497 A	02-09-1997
			AU 1614797 A	02-09-1997
			EP 0821825 A	04-02-1998
			EP 0830675 A	25-03-1998
			WO 9730444 A	21-08-1997
			JP 11504462 T	20-04-1999
			JP 11506248 T	02-06-1999
			US 5802032 A	01-09-1998
US 5703855	A	30-12-1997	JP 6295439 A	21-10-1994
			JP 7029239 A	31-01-1995
			JP 7050027 A	21-02-1995
			DE 4411855 A	13-10-1994
			KR 131434 B	22-04-1998
			KR 204001 B	15-06-1999
			US 5848045 A	08-12-1998

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 6165

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-11-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0933759 A	04-08-1999	JP 11213429 A	06-08-1999
-----			

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82